arXiv:physics/0512274v2 [physics.ed-ph] 31 Dec 2005

A radioactive decay simulation (for Education)

Ihab F. Riad, Mohammed El Shazali Sir Elkatim,
Physics Dept. Faculty of Science, University of Khartoum

Abstract

This article is intended for physics educators and students at school and undergraduate level. It is used at our department to introduce students to simulation and offer a guide in using statistics in physics. The simulation code was created using Matlab, and was given a friendly interface with a Labview module.

1 Introduction:

During our teaching for undergraduates of physics we saw a need for an experiment that can demonstrate the close ties between experiments and statistical analysis. We also felt the need of introducing the idea of simulating a physics experiment for the huge and increasing role of simulation in the different fields of science. We used to have an experiment targeting the Poisson distribution and Radioactivity, the experiment was performed with a Geiger counter, so it was a good choice for combining the two ideas. The simulation code was created with a Matlab script and was then given a friendly interface with the help of a Labview module. For running the code you need to have Matlab installed on your system.

2 Theory:

The simulation depends on the Normal number generator available through the Matlab. To simulate the decay behavior of a radioactive sample having N_o nuclide, and decay constant λ during a time Δt, N_o uniform random numbers were generated, with each number representing a potential decaying nuclide. To demonstrate this note that the probability of having a random number x between a and b such that $x_o > x > b$ is given by

$$\begin{aligned} P(x > x_o) &= \int_{x_o}^{b} \frac{1}{b-a} dx; \\ &= \frac{(b - x_o)}{b-a}; \end{aligned} \tag{1}$$

setting $a = 0$ and $b = 1$, in our case we get

$$P(x > x_o) = 1 - x_o. \tag{2}$$

Noting that the probability of a single nuclei to decay in a time Δt is $\lambda \Delta t$, or

$$\begin{aligned} \lambda \Delta t &= 1 - x_o, \quad \text{hence} \\ x_o &= 1 - \lambda \Delta t. \end{aligned} \tag{3}$$

i.e any uniform random number grater than x_o represent a decaying nuclide. The Matlab uniform random number generator is used to create N_o random number and each is checked with condition equation(3) to identify it as a non-decaying or decaying nuclei which in such a case counted.

The time Δt is controlled trough the Labview interface. In the simulation you are given a number of different samples to choose among each represent a different decay constant. You also have three choices of N_o such that for small $N_o = 10^6$, medium $N_o = 5 \times 10^6$ and large $N_o = 50 \times 10^6$. The above choices were made for the limited computational power of the system used. The number of trials to be simulated can be controlled and up to a thousand trials can be simulated. The result of each trial is recorded at a .txt file of your choice.

3 Application:

The Labview is started, and after making your choices of the different variables press the start bottom. The result of each trial will be recorded at a file, which can then be read and the data treated with a data analysis tool. An example of the simulation is the histogram below created from 851 trials for sample **E** with medium number of nuclei for a time of 60min for each trial. Using all this information the half life of the sample can be calculated

$$\bar{N} = N_o \left(1 - e^{-\lambda \Delta t}\right). \tag{4}$$

Using the value of $\bar{N}$ collected from the simulation, λ can be found as

$$79.189 = 5 \times 10^6 \left(1 - e^{-\frac{\lambda}{365 \times 24}}\right),$$

$$T_{\frac{1}{2}} = 4.990 years.$$

Compare this to the value set in the code.

Note:

If you would like to have the simulation please send me an email and we will be happy to send it.

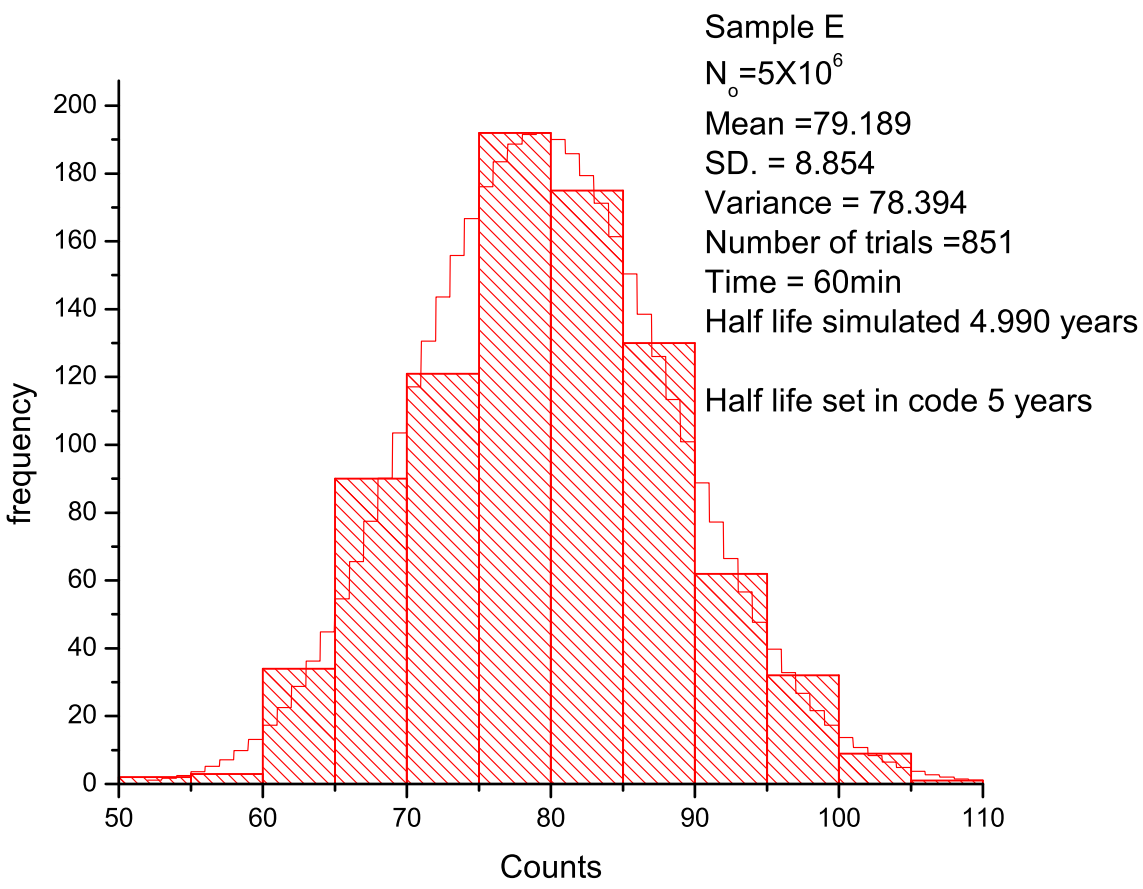
Sample E
N$_o$=5X10^6
Mean =79.189
SD. = 8.854
Variance = 78.394
Number of trials =851
Time = 60min
Half life simulated 4.990 years
Half life set in code 5 years
frequency
Counts
0
20
40
60
80
100
120
140
160
180
200
50
60
70
80
90
100
110

4 The Simulation:

In this section we include the code and a snapshot of the Labview interface.
Matlab Script

```
1: format long g 2: if n==0;
3: x= 1-(log(2)/(0.5*24*3600))*1*60*t;
4: elseif n==1;
5: x= 1-(log(2)/(10*24*3600))*60*t;
6: elseif n==2;
7: x= 1-(log(2)/(160*24*3600))*60*t;
8: elseif n==3;
9: x=1-(log(2)/(2*365*24*3600))*60*t;
10: elseif n==4;
11: x=1-(log(2)/(5*365*24*3600))*60*t;
12: end
13: if c==0;
14:d=1000000;
15: elseif c==1;
16: d=5000000;
17: elseif c==2;
18:d=50000000;
19: end
20: z=0;
21: for i=1 : d
22: y=rand;
23: if y¿x
24: z=z+1;
25: else
26: z=z;
27: end
28:end
29: z
```

poisson.vi
C:\Documents and Settings\ihab\Desktop\poisson.llb\poisson.vi
Last modified on 13/01/2005 at 10:11 PM
Printed on 13/01/2005 at 11:39 PM

Front Panel

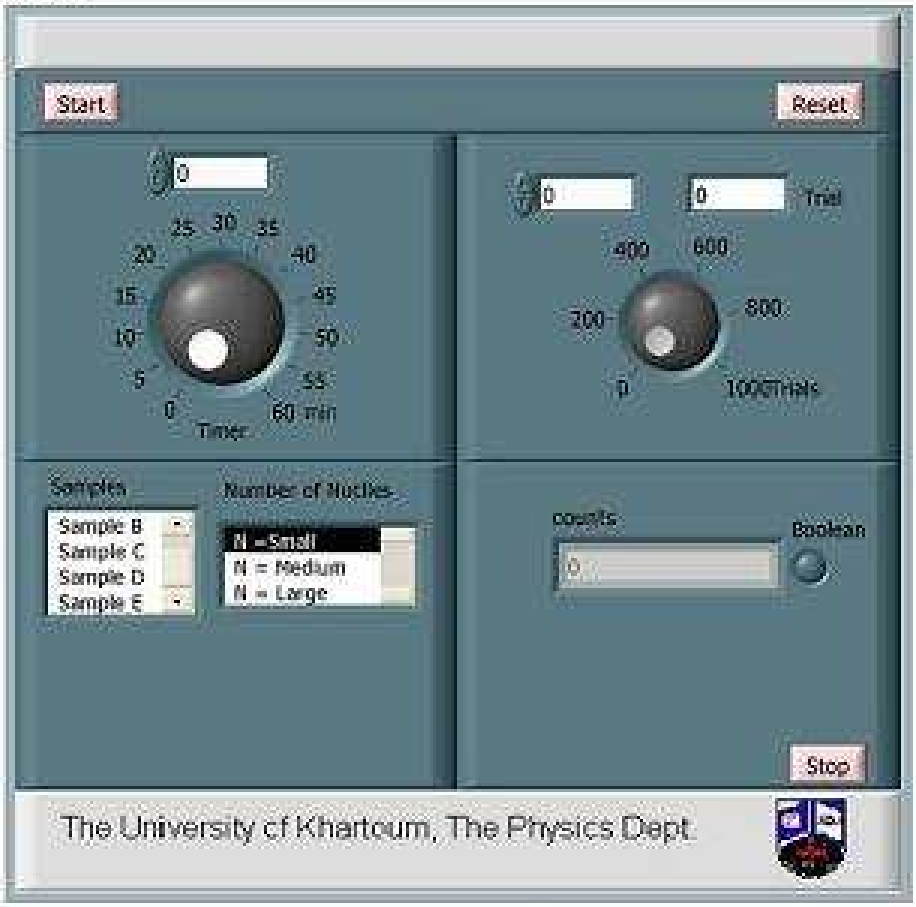

Controls and Indicators